

YOUR
SMART
ENERGY



STORION-LC-TB125

Liquid-Cooling
Outdoor Cabinet

POWER

125 kW Inverter

CAPACITY

261.2 kWh per Cabinet
Up to 522.4 kWh per System




KEY FEATURES

- All-in-One Design
- Pre-installed at the factory, minimizing installation time
- Three-level Intelligent Fire Suppression System, UL9540A certified
- Active Cell Balancing, Maximizing Life Cycle and Efficiency of System
- Backup Power Available with STS Cabinet ($\leq 20\text{ms}$ Switch Time)
- Intelligent Liquid-cooling Temperature Control System
- Max 50 units in parallel (On-Grid Mode)

STORION-LC-TB125

System Diagram

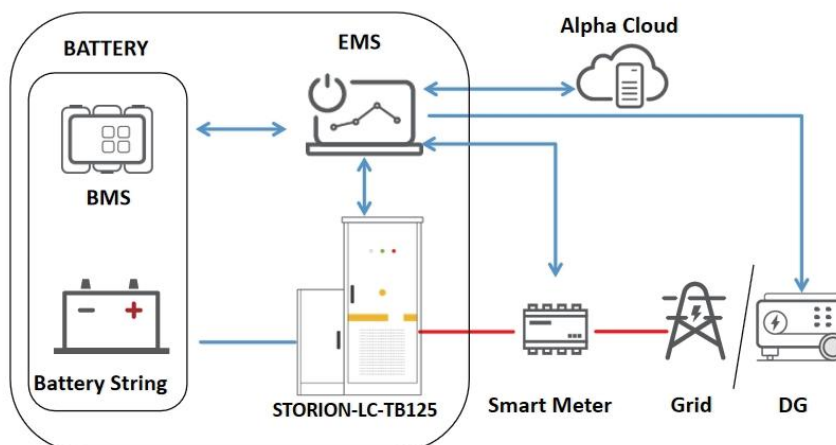

STORION-LC-TB125	
System Parameter	
Battery Chemistry	LiFePO4
Energy Capacity	261.2 kWh per Cabinet
Warranty	5 Years Product Warranty, 10 Years Battery Warranty
AC side (on-grid)	
Rated Output Power	125 kW
Max. Output Apparent Power	137.5 kVA
Nominal Grid Voltage	400 V(±15%), 3L/N/PE
Nominal Grid Frequency	50/60 Hz (± 5 Hz)
Max.THD of current	< 3 % (Rated Power)
AC Power Factor	1.0 leading ~ -1.0 lagging
AC side (off-grid)	
Nominal Output Power	125 kW
Nominal Voltage	400 V 3L / N / PE
Frequency	50 / 60 Hz
Overload	110% Continuous; 120% 1 min
Backup Switch Time (with extra STS)	< 20ms
Max.THD of voltage	< 3 % (Linear Power)
Efficiency	
Max. Efficiency	97%
System Efficiency (RTE)	90.6%
General Parameter	
Dimension(W x D x H)	(1003+472) x 1500 x 2482 mm*
Battery Modules Connection	5 Modules in Series
Weight	2.9 t (+150 kg) *
Corrosion Protection Class	C4
Ingress Protection	IP55
Noise Emission	≤ 75 dB @1m
Operating Ambient Temperature Range	-20 °C ~ 50 °C (> 45 °C Derating)
Operating Humidity Range	0 ~ 95 % RH
Max Operation Altitude	3000 m(> 2000 m Derating)
Fire-fighting System	Aerosol (Pack & Rack)+ Sprinkler + Smoke / Temperature Detection
Communication	CAN, RS485, USB, LAN, WIFI
Dispatching Protocol	Modbus TCP, API
Compliance	IEC 62477, IEC 61000, IEC 62109, IEC 61727, IEC 62116, EN 50549-1&2&10, VDE 4105/4110/4120, G99, TOR, C10/11

* STS cabinet are separate outdoor cabinets that can be assembled on the side of the system cabinet by stacking installation method

STORION-LC-TB125



Model		STORION-LC-TB125
Battery Cluster System		
Item	Data	
Battery Module		
Battery Module	M166314-S	
Battery Chemistry	LiFePO4	
Pack Configuration	3.2 V / 314 Ah @ 1P52S	
Internal Resistance	≤10 mΩ	
Nominal Capacity	52.124 kWh	
Rated Voltage	166.4 V	
Operating Voltage Range	140.4 ~ 187.2 V	
Rated Charing/Discharging Power	26.062 kW (0.5P)	
Cycle Life	8000 @EOL 70%**	
Operating Ambient Temperature Range	-30 °C ~ 55 °C***	
Ingress Protection	IP67	
Communication	CAN	
Dimensions (W x D x H)	810 * 1125.5 * 237.5 mm	
Weight	333 kg	
Compliance	IEC 62619, IEC 62477, IEC 61000, UL9540A	
Meter (Optional)		
	Model	DTSU666
	Rated Voltage	230V AC / 400V AC
	Accuracy Class	±1%
	Communication	RS485, Modbus RTU
	Dimensions (W×D×H)	72×80×101 mm
	CT Model	AKH-0.66, K-30×20
	CT Current Ratio	400 / 5 A
	CT Perforation Size	32×22 mm
Expansion Battery Cluster (Optional)		
	Model	STORION-LC261
	Battery	M166314-S
	Cluster Capacity	261.2 kWh per Cabinet
	Rated Charging/Discharging Power	130.6 kW(0.5P)
	Battery Cluster Voltage Range	702 ~ 936V
	Battery Rack	5 Modules in series
	Fire-Fighting System	Aerosol (Pack & Rack)+ Sprinkler + Smoke / Temperature Detection
	Dimensions (W×D×H)	1003 x 1500 x 2482 mm
	Weight	2.7t

**Under specific test conditions.

***Max. charge/discharge current derating may occur with changes in temperature and SoC.



Alpha ESS Co., Ltd.

+86 513 8060 6891
 info@alpha-ess.com
 www.alphaess.com
 Jiuhua Road 888, Nantong High-Tech Industrial Development Zone, Nantong, Jiangsu Province, China

Alpha ESS Suzhou Co., Ltd.

+86 512 6828 7609
 info@alpha-ess.com
 www.alphaess.com
 Building 10-A, Canal Town Industrial Park, 99 Taihu E Rd, Wuzhong District, Suzhou, Jiangsu Province, China

Alpha ESS Europe GmbH

+49 6196 7863 485
 europe@alpha-ess.de
 www.alphaess.de
 Horizon Tower 18.0G Alred-Herrhausen-Allee 3-5 65760 Eschborn, Germany

Alpha ESS Australia Pty. Ltd.

+61 402 500 520
 Australia@alpha-ess.com
 www.alphaess.com
 8/15-21 Gibbs Street, Chatswood, NSW 2067 Australia

Alpha ESS Italy S.r.l.

+39 339 462 4288
 info@alphaess.it
 www.alphaess.it
 Via Del Molinuzzo 83, 59100 Prato (PO), Italy

Alpha ESS UK Ltd.

+44 145 354 5222
 info@alpha-ess.com
 Drake house, Long street, Dursley, gl11 4hh UK

Alpha ESS International Pte. Ltd.

+65 6513 1125 / +65 6513 1126
 Singapore@alpha-ess.com
 2 Corporation Road #01-06A Corporation Place 618494 Singapore

Alpha ESS USA, Inc.

+1 408 368 7828
 usa@alpha-ess.com
 Unit 5 2180 S Ivanhoe St, Denver, CO 80222 USA

Alpha ESS Korea Co., Ltd.

info@alpha-ess.com
 2F, 19-4, Nohyeong 11-gil, Jeju-si, Jeju-do, Republic of Korea